

M.10

配件

配件

匹配插头，插座和螺纹转接头



- 高品质配件
- 针对产品进行研发
- 针对产品进行配套
- 产自原厂的产品

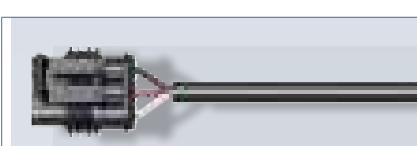
匹配插头

对应带集成插头的压力开关

M.10

配件

soco

德国标准 DT06-2S (对应 DT04-2P) 2 x 0.5 mm ² Radox 缆线, IP65	适用型号 0110 / 0111 0410 / 0411	订货号: 1-1-10-653-118	
德国标准 DT06-3S (对应 DT04-3P) 3 x 0.75 mm ² PUR 缆线, IP67	适用型号 0116 / 0117 / 0136 / 0137 0416 / 0417	订货号: 1-1-36-653-160	
TE AMP安普 Superseal 1.5°, 2-pin 2 x 0.5 mm ² Radox 缆线, IP65	适用型号 0112 / 0113 0412 / 0413	订货号: 1-1-12-653-113	
TE AMP安普 Superseal 1.5°, 3-pin 3 x 0.5 mm ² Radox 缆线, IP65	适用型号 0132 / 0133	订货号: 1-1-32-653-158	
TE AMP安普 Junior Timer, 2-pin 2 x 0.5 mm ² Radox 缆线, IP65	适用型号 0118 / 0119 0418 / 0419	订货号: 1-1-18-653-116	
Packard MetriPack 280, 2-pin 2 x 0.5 mm ² Radox 缆线, IP65	适用型号 0114 / 0115 0414 / 0415	订货号: 1-1-14-653-114	
卡口 DIN 72585 A1-2.1 2 x 0.5 mm ² Radox 缆线, IP65	适用型号 0120 / 0121	订货号: 1-1-20-653-112	
M12 DIN EN 61076-2-101-LF, 4-pin 4 x 0.34 mm ² PUR 缆线, IP65	适用型号 0122 / 0123 / 0124 / 0125 0134 / 0135 / 0424 / 0425	订货号: 1-1-00-653-162	

所有适配插头带有2 m长的缆线

插接头与保护帽

- 使用插接头达到IP65或使用橡胶保护帽达到IP54来提升防护等级
- 使用插接头使安装简易

			
橡胶保护帽	橡胶保护帽	橡胶保护帽	插接头
带中央缆线串口 适用于1.5-5mm 直径的缆线	带双缆线串口 适用于1.7-2.2mm 直径的缆线	带双缆线串口 适用于1.7-2.3mm 直径的缆线	cCSAus 批准 壳体：聚酰胺 PG9 螺纹适用 (紧固范围 6 - 9 mm)
带橡胶保护帽匹配: IP54 适用于最高电压达42V的 条件下	带橡胶保护帽匹配: IP54 适用于最高电压达42V的 条件下	带橡胶保护帽匹配: IP54 适用于最高电压达42V的 条件下	带插接头匹配: IP65 适用于最高电压达250V的 条件下
适用型号: 0151 / 0163 / 0164 / 0166 0167 / 0168 / 0169	适用型号: 0151 / 0163 / 0164 / 0166 0167 / 0168 / 0169	适用型号: 0170 / 0171 / 0180* / 0181* / 0183* / 0186* / 0187* 0190 / 0191 / 0196 / 0197 (*最高电压42V)	适用型号: 0170 / 0171 / 0180 / 0181 0183 / 0186 / 0187 0190 / 0191 / 0196 / 0197
订货号: 1-1-66-621-010	订货号: 1-1-66-621-003	订货号: 1-1-70-621-007	订货号: 1-1-80-652-002

插接头 符合DIN EN 175301-803-A (DIN 43650) P69螺纹适用 (紧固范围6 - 9mm) 终端缆线接口 尺寸: 0.34---1.5mm ² (AWG22---AWG16), 终端螺纹的紧固力矩 0.4 Nm 带插接头匹配: IP65 适用于最高电压达250V的 条件下	插接头e 带指示灯, 符合 DIN EN 175301-803-A (DIN 43650) P69螺纹适用 (紧固范围6 - 9mm) 终端缆线接口 尺寸: 0.34---1.5mm ² (AWG22---AWG16), 终端螺纹的紧固力矩 0.4 Nm 带插接头匹配: IP65 适用于最高电压达24或 250V的条件下	插接头 M12x1 DIN EN 61076-2-101 A 直通型, 4-接线柱 终端缆线接口截面 0.75 mm ² (AWG18), 终端螺纹的紧固力矩 0.4 Nm 带插接头匹配: IP65 适用于最高电压达48V的 条件下	插接头 M12x1 DIN EN 61071-2-101 D 转角型, 4-接线柱 终端缆线接口截面 0.75 mm ² (AWG18), 终端螺纹的紧固力矩 0.4 Nm 带插接头匹配: IP65 适用于最高电压达48V的 条件下
适用型号: 0150 / 0161 / 0162 / 0175 0184 / 0185 / 0194 / 0195	适用型号: 0150 / 0161 / 0162 / 0175 0184 / 0185 / 0194 / 0195	适用型号: 0122 / 0123 / 0124 / 0125 0134 / 0135 / 0424 / 0425 所有的传感器和电子式压力 开关都有一个M12接头	适用型号: 0122 / 0123 / 0124 / 0125 0134 / 0135 / 0424 / 0425 所有的传感器和电子式压力 开关都有一个M12接头
订货号: 1-1-84-652-009	订货号: 适24V直流: 1-1-84-652-011 适250V交流: 1-1-84-652-010	订货号: 1-6-00-652-016	订货号: 1-6-00-652-017

螺纹转接头

适用于临时变更和用户定制解决方案

- 螺纹转接头的材料和尺寸能够和我们的开关和传感器完美契合。
- 转接头供货时附带密封。



适用于G 1/8内螺纹

真空开关
携带SUCO螺纹代码15



适用于G1/4 DIN EN ISO 1179-1 (DIN 3852-E)

所有的压力开关和传感器
携带SUCO螺纹代码41

双面螺纹 铜	
G 1/8 E型 DIN EN ISO 1179-2 包含 密封圈NBR	G 1/8 A型 DIN ISO 16030 包含密封圈 不锈钢/NBR
NPT 1/8-27	NPT 1/4-18
订货号： 1-1-00-420-014	订货号： 1-1-00-420-029

螺纹转接头 不锈钢(1. 4305/AISI303)					
G 1/4 DIN EN ISO 1179-1 (DIN 3852-E) 内螺纹					
M14 x 1.5 E型 DIN 3852-E 包含密封圈FKM	NPT 1/4-18	9/16-18UNF 包含FKM O型圈	M10 x 1 A型 DIN 3852-1	订货号： 1-1-00-420-028	订货号： 1-1-00-420-029
订货号： 1-1-00-420-027	订货号： 1-1-00-420-029	订货号： 1-1-00-420-027	订货号： 1-1-00-420-020	订货号： 1-1-00-420-021	订货号： 1-1-00-420-022



螺纹转接头 镀锌钢(不含六价铬)			转接头 铝		
G 1/4 内螺纹 包含密封圈FKM			M14 x 1.5 DIN EN ISO 6149-1 内螺纹		
R 1/4	3/8-24 UNF-2A	G 1/4	M12 x 1.5	NPT 1/8-27	法兰设计 包含 NBR O型圈
订货号: 1-1-00-420-009	订货号: 1-1-00-420-013	订货号: 1-1-83-420-006	订货号: 1-1-83-420-007	订货号: 1-1-83-420-008	订货号: 1-1-00-420-025