

## M.9

Vacuum

## 0150

Vacuum switch up to 250 V with changeover contact

- Aluminium housing
- Operating voltage up to 250 V
- Changeover with silver contacts
- Overpressure safety up to 20 bar<sup>1)</sup>
- Socket device similar to DIN EN 175301 (DIN 43650)
- Hysteresis approx. 50 150 mbar (cannot be changed)

p <sub>max.</sub> in bar	Adjustment range in mbar (relative)	Tolerance in mbar at room temperature	Thread	Order number

## 0150 Vacuum switch

201)	100 050	. 50	C 1/0 famala	1	0150 456 15 4 001
20"	100 - 950	± 50	G 1/8 female		0150 - 456 15 - 4 - 001


## Seal material – Application areas

**ECO** Air, oils, greases, fuel/gasoline

Temperature resistance: -20 °C ... +100 °C

Your order number:	0150 – 456 15 – <mark>4</mark> – 001

4

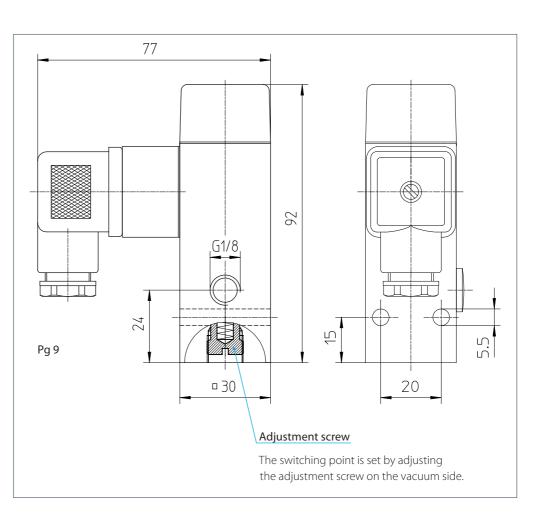



<sup>1)</sup> Static value. Dynamic value is 30-50 % lower. Values pertain to the hydraulic/pneumatic part of the pressure switch.

Suco China - Suzhou Bethma Automatic Equipment Co.,Ltd. Tel: 0512-62895546 Email: info@bethma.com